


Creating unprecedented products with unprecedented performance.

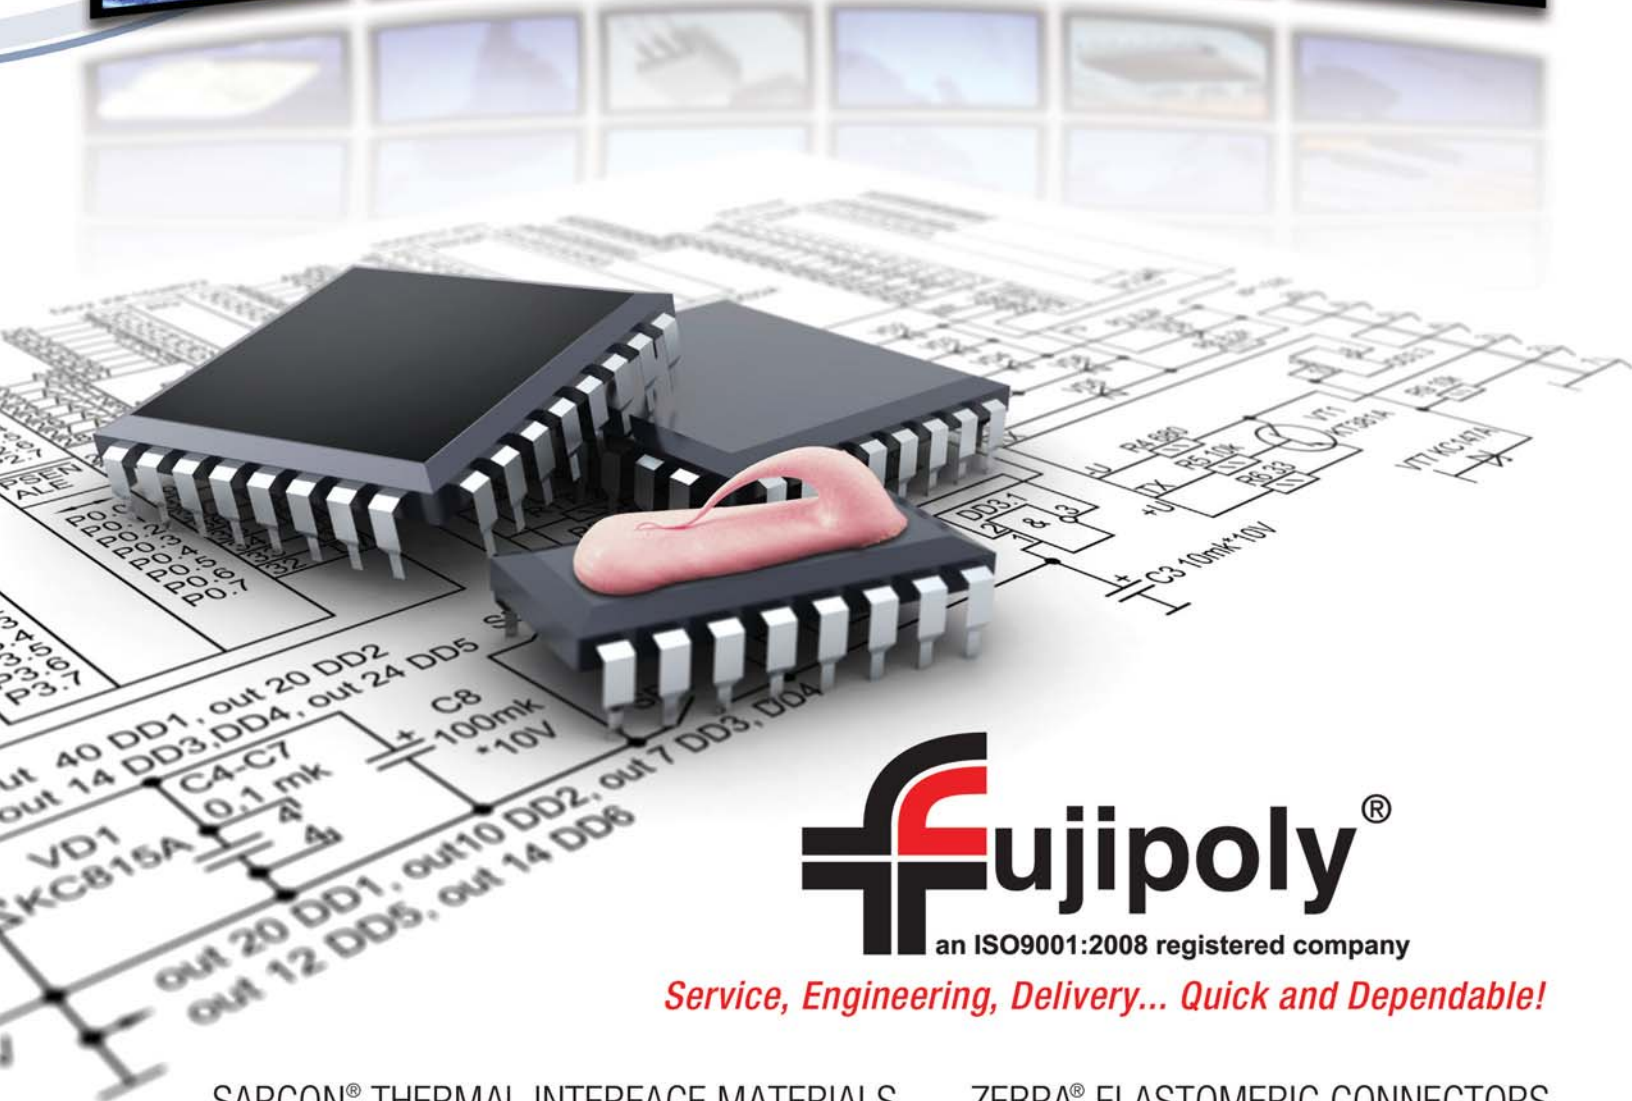

Fujipoly®
an ISO9001:2008 registered company

Service, Engineering, Delivery... Quick and Dependable!

SARCON® THERMAL INTERFACE MATERIALS ZEBRA® ELASTOMERIC CONNECTORS
CUSTOM SILICONE EXTRUSIONS

FUJIPOLY.COM

FUJIPOLY SILICONE ELECTRONIC PACKAGING COMPONENTS

A NETWORK of DEPENDABLE PRODUCTS to INCREASE YOUR PRODUCTS' DEPENDABILITY

A worldwide network to serve your electronic packaging needs. Fujipoly's multi-plant system was established for, and continues to grow toward, excellence in meeting customers' needs matched with excellence in product performance.

We manage a globally responsive, diverse group of facilities. Technologies have been both developed and acquired. Locations have been established based on a borderless business strategy to meet the growing trend of internationalization.

Manufacturing and distribution centers located in Europe, North America and Asia keep us close to our customers' needs while giving them convenient access to our increasing technologies.

Less than 5% of silicone potential has been researched to date. And, probably even more applications than we can now imagine are possible.

The inherent advantages of silicone already seem limitless. There are very few commercial or industrial products which do not contain some form of it as a molded, extruded or die-cut shape.

The composition of formulations is almost infinite - each offering strong advantages in one characteristic or another, many with great superiority over other materials.

Fujipoly's proprietary research and specific treatments are focused on obtaining the highest overall performances for the field of electronic packaging. Some of these areas are:

- Heat Resistance
- Flame Retardance
- Low Compression Set
- Oil & Solvent Resistance
- Weather Resistance
- Thermal Conductivity
- Electrical Conductivity
- Electrical Insulation
- Cold Resistance
- Self adhesion
- Variety of Shapes and Sizes Possible
- Aging Resistance
- Ease of Custom Manufacturing



ZEBRA® Elastomeric Connectors


ZEBRA® Elastomeric Electronic Connectors are a comprehensive group of high performance interconnect devices with applications throughout the entire field of electronics.

With the expansion of micro-electronics and miniaturization of all products, the same high reliability must be maintained.

ZEBRA® Elastomeric Connectors are an obvious choice. And one which offers a variety of alternatives based on the primary design objectives. Some of the more important considerations are:

- High Density; increased number of I/O's
- Low resistance, high current capacity
- Low insertion force, low compression force
- Redundant contact engagement
- High electrical and mechanical reliability
- Chemical stability, degradation resistance
- Cost-effectiveness, ease of assembly

ZEBRA® Elastomeric Connectors have alternating conductive and non-conductive layers. See diagram below. The conductive layers are oriented vertically in the thickness direction, making contact from top to bottom.

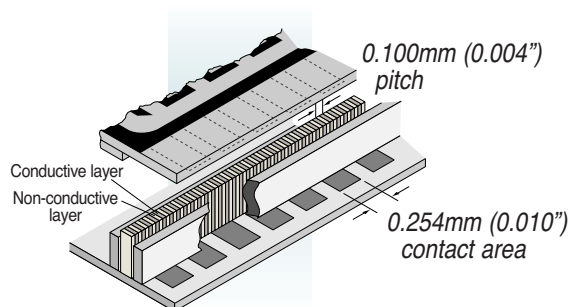


Typical ZEBRA® Connector interface between two contact areas; such as, PCB to LCD, or PCB to PCB.

All styles offer redundant contact depending on the pitch of the conductive layers, some as small as 0.05 mm centerline (see drawing above).


APPLICATIONS:

- LCD and EL displays
- Board-to-board
- Chip-to-board
- Memory cards
- Flex circuit-to-board
- Burn-in sockets
- Miniature and low profile interconnect - general electronics

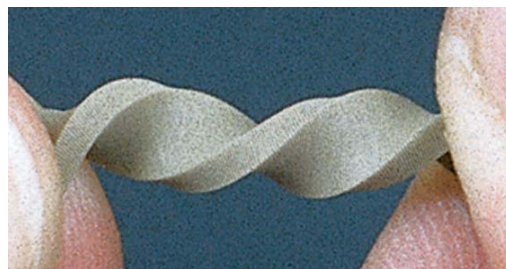


High strength bonding unitizes layers into one rugged body.

Each of the styles is also available with outer support sections along the entire length on one or both sides (except Series 8000). The support is available in sponge or solid silicone rubber, and creates a larger width area. This eliminates the need for a holder while still allowing a very low compression force during deflection. For optional ordering information, see instructions on page 6 under "Self-Supported Connectors".

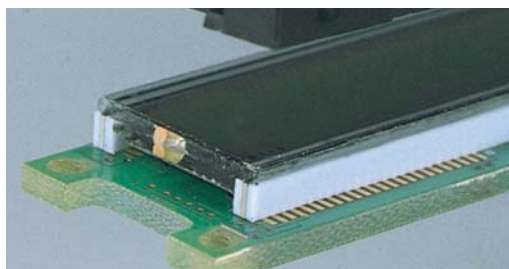

ZEBRA® Silver Connector in medical instrument display.

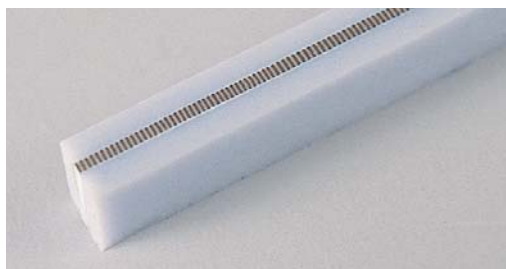


Typical ZEBRA® Connector with optional silicone rubber self-support sections on each side.

ZEBRA® CONNECTOR TECHNICAL DATA



The six ZEBRA® Elastomeric Connector designs below are detailed in their dimensional and performance characteristics. Follow the general guidelines to determine the design characteristics most suitable for your application. See following pages for detailed characteristics.

The photo enlargements at right demonstrate the multiple contact points per circuit conductor pad for typical ZEBRA® connector designs.

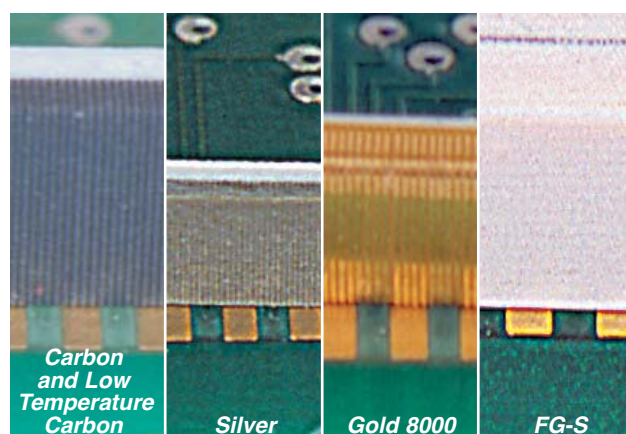


Name	Application Guidelines	Typical Products
Carbon	Economical general use with contact pitches at 140, 240 or 500 per inch	LCD's for aerospace, aircraft, military, meters, instruments, cameras
Low Temperature Carbon	Low temperature, outdoor applications, specifications as low as -60°C with contact pitches at 240 per inch	
Silver	300mA current carrying capacity, rugged long-life aging with contact pitches at 240 per inch	
Gold 8000	Zero insertion force, tight pitch, low compression force, very low resistance, very high current carrying capacity; contact pitches at 100, 133, 166 per inch	Electroluminescent displays, component-to-board, burn-in sockets, PCB to PCB, chip on glass, LCD's, chip on foil, COF's
FG-S	Zero insertion force, very low compression force, low resistance, high current carrying capacity, 240 gold-plated contacts per inch in a single row	

TYPICAL PERFORMANCE CHARACTERISTICS:

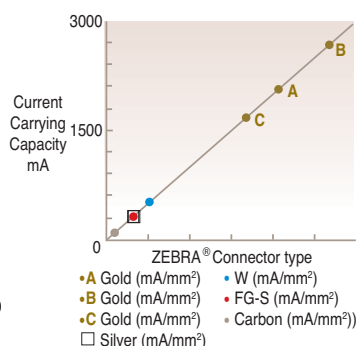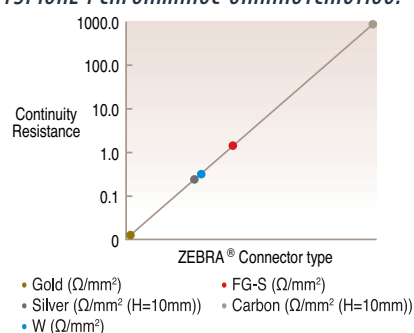

SIDE SUPPORT or INSULATION BARRIER:



Drawing at left shows side support or insulation on one or both sides, or one of each.


Various materials are available from the minimum insulating barrier of 0.05mm to support layers of up to 1.5mm. Support layers can be soft silicone rubber, or medium and soft silicone sponge. Recommended height is twice the width for minimum force deflection.

See page 6 for details. Consult customer service for ordering specifications.

Part Number Nomenclature:

To specify a connector to your exact requirements, substitute the metric measurements for width, length and height according to instructions below; example part# Ag(2.0 IB1 x 20 x 2.0)-U; **Note: For Carbon Zebra, make sure to advise pitch desired.**

ZEBRA® Ag (2.0 - IB1 x 20 x 2.0)

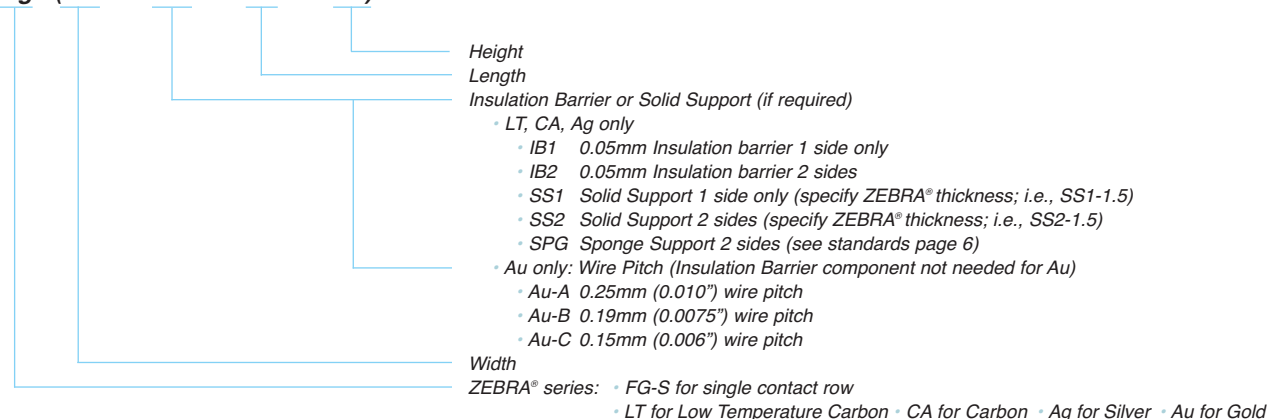

ZEBRA® Elastomeric Connectors

ZEBRA® CARBON and LOW TEMPERATURE CARBON CONNECTORS

FUJIPOLY ZEBRA® connectors (see figure 1) have alternating layers of conductive carbon-filled and non-conductive silicone rubber. They make reliable connections by being deflected between contacting surfaces. ZEBRA® connectors are used for connecting any LCD from small displays for watches to large area displays for instruments. Table A shows the different types of ZEBRA® connectors available. Table C shows performance characteristics.

Figure 1 shows the three dimensions of the ZEBRA® connector. When ordering, the three dimensions should be specified within the limits shown in table B.

For best overall performance, ZEBRA® connectors must be ordered and used with a ratio of H/W equal to or greater than 1.5.

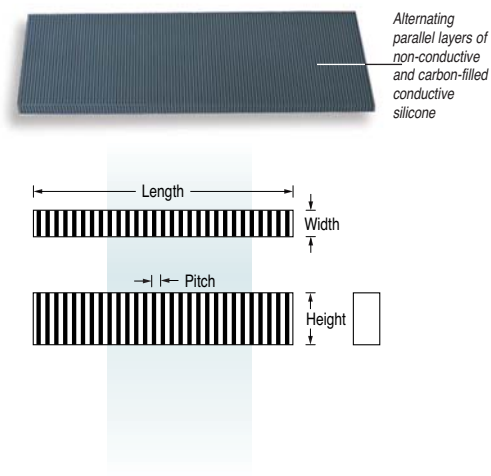


Figure 1

Series	LCD Contact Spacing Center-to-Center	Pitch: Sum of the Thickness of an Adjacent Conductive and Non-conductive Layer		Conductive Layers per inch	Individual Conductive and Insulating Layer Thickness		Available Lengths Maximum
	Minimum	Nominal	Maximum		Minimum	Maximum	
1002 (CZ410/CZ710)	0.015 in. 0.38 mm	0.004 in. 0.10 mm	0.006 in. 0.15 mm	240	0.001 in. 0.025 mm	0.004 in. 0.10 mm	9.0 in. 230 mm
2004 (CZ418)	0.020 in. 0.50 mm	0.007 in. 0.18mm	0.010 in. 0.25 mm	140	0.002 in. 0.050 mm	0.006 in. 0.15 mm	9.0 in. 230 mm
2005 (CZ405/CZ705)	0.010 in. 0.25 mm	0.002 in. 0.050 mm	0.004 in. 0.10 mm	500	0.0004 in. 0.010 mm	0.0024 in. 0.060 mm	9.0 in. 230 mm
LT 200 (CZ610)	0.015 in. 0.38 mm	0.004 in. 0.10 mm	0.006 in. 0.15 mm	240	0.001 in. 0.025 mm	0.004 in. 0.10 mm	5.0 in. 127 mm

TABLE A

Measurement

Tolerance (inches/mm)

Length=L	0.157 in. to 2.40 in. — ± 0.008 in. / 2.410 in. to 6.00 in. — ± 0.015 in. / 6.010 in. to 7.87 in. — ± 0.020 in. / 7.880 in. to 9.00 in. — ± 0.039 in. / 4.00 mm to 61.00 mm — ± 0.20 mm 61.2 mm to 152.4 mm — ± 0.38 mm 152.6 mm to 200.0 mm — ± 0.50 mm 200.1 mm to 230.0 mm — ± 1.00 mm
Height=H	0.020 in. to 0.750 in. ± 0.005 in. / above 0.750 in./19.0 mm consult factory 0.50 mm to 19mm ± 0.127 mm
Width=W	0.015 in. to 0.039 in. — ± 0.002 in. / 0.040 in. to 0.079 in. — ± 0.003 in. / 0.080 in. to 0.118 in. — ± 0.005 in. / above 0.118 in./3.00 mm consult factory. 0.38 mm to 1.0 mm — ± 0.050 mm 1.01 mm to 2.0 mm — ± 0.076 mm 2.01 mm to 3.0 mm — ± 0.127 mm

TABLE B

ZEBRA® Connectors	Temperature Range		Current Carrying Capacity 0.040" x 0.040" pad	Resistance Between Layers
	Minimum	Maximum		
Carbon	-40°F -40°C	212°F 100°C	0.005 amps	10 ¹² ohms
Low Temperature LT 200	-85°F -65°C	260°F 125°C	0.005 amps	10 ¹² ohms

TABLE C

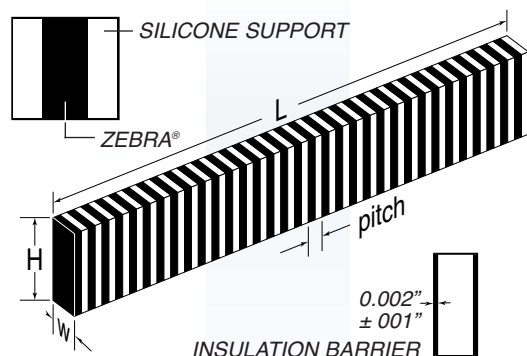


Figure 2 Recommended Height (H) should be 1.5 x Width (W) dimension for minimum force deflection. Maximum Skewness 2% of Height.

ZEBRA® CONNECTOR DIMENSIONS

Figure 2 shows the three dimensions of the ZEBRA® connector. When ordering, the three dimensions should be specified within the limits shown in Table B. For best overall performance, ZEBRA® connectors must be ordered and used with a ratio of H/W equal to or greater than 1.5. Details show silicone support (left) and insulation barrier (right). Each is available on one or both sides. Configurations may also include support on one side and insulation on the other.

ZEBRA® CONNECTOR INSULATING BARRIER

Description	Insulating Barrier
Color (one only)	White
Hardness, Durometer A	30
Dielectric Strength volts/mil.	500
Resistance, ohms	10^{12}
Insulating Barrier Width (B) in.*	0.002 ± 0.001
(B) mm	0.050 ± 0.025

TABLE D *The tolerance of W_1 is equal to the sum of the tolerances of W.

NOMINAL RESISTANCE CALCULATION

To calculate the resistance of the ZEBRA® connector use the following formulas:

Where: C_w = Contact pad width in inches
 H = ZEBRA® connector height in inches
 W = ZEBRA® connector width in inches

Metric:

$$R = \frac{60 \times H}{E_w \times W}$$

Inches:

$$R = \frac{2.37 \times H}{E_w \times W}$$

Where:

R = Resistance (Ω)
 E_w = Electrode Pad width (mm or inches)
 W = Connector width (mm or inches)
 H = Connector height (mm or inches)

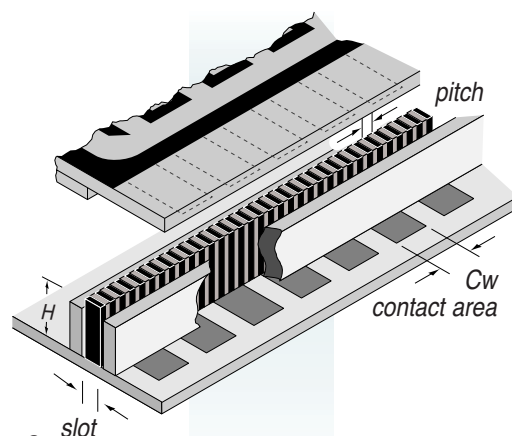


Figure 3

NOMINAL FORCE DEFLECTION - PLAIN ZEBRA® OR INSULATION BARRIER TYPE

ZEBRA® connectors should be deflected 5% to 25% of H. To calculate F-Force for deflection, use the following formula:

Where:

F = Force (N)

$$D = \frac{H - H_1}{H} \times 100 (\%)$$

H = Height of connector (mm or inches)

H_1 = Deflected height of connector (mm or inches)

W = Width of connector (mm or inches)

W_1 = Width of ZEBRA portion (mm or inches)

L = Length of connector (mm or inches)

Metric:

$$F(N) = 9 \times D \times W \times L \times 9.8 \times 10^3$$

Inches:

$$F(N) = 5806 \times D \times W \times L \times 9.8 \times 10^3$$

NOMINAL FORCE DEFLECTION - SILICONE SUPPORT TYPE

Metric:

$$F(N) = [(9 \times D \times W_1 \times L) + \{2.2 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^3$$


Inches:

$$F(N) = [(5806 \times D \times W_1 \times L) + \{1419 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^3$$

ZEBRA® Elastomeric Connectors

ZEBRA® SOLID SELF-SUPPORTED CONNECTORS

The Solid Self-Supporting ZEBRA® connector utilizes a standard ZEBRA® connector element supported by a soft, non-conductive silicone rubber on one or two sides. The silicone rubber creates a larger width that eliminates the need for a holder, and yet the force required for deflection is very low. The standard Solid Self-Supporting ZEBRA® connector has a 0.020"/0.50mm wide ZEBRA® connector element and is available in 8 different widths to accommodate LCD's with a glass lip overhang of 0.050"/1.27 mm minimum.

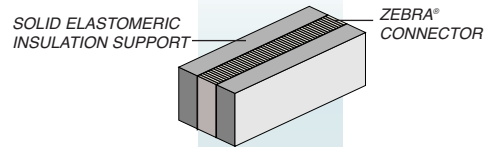

ZEBRA® Element	LCD Contact Spacing in/mm	Standard Connector Widths	
2004 (CZ418)	0.020/0.50	0.050 in./ 1.27 mm	0.090 in./ 2.3 mm
1002 (CZ410/CZ710)	0.010/0.25	0.060 in./ 1.50 mm	0.100 in./ 2.5 mm
2005 (CZ405/CZ705)	0.006/0.15	0.070 in./ 1.8 mm	0.120 in./ 3.00 mm
		0.080 in./ 2.0 mm	0.140 in./ 3.50 mm

Measurement


Tolerance (inches/mm)

Length=L	0.157 in. to 2.40 in. — ± 0.008 in.	4.00 mm to 61.00 mm — ± 0.20 mm
	2.410 in. to 6.00 in. — ± 0.015 in.	61.2 mm to 152.4 mm — ± 0.38 mm
	6.010 in. to 7.87 in. — ± 0.020 in.	152.6 mm to 200.0 mm — ± 0.50 mm
	7.880 in. to 9.00 in. — ± 0.039 in.	200.1 mm to 230.0 mm — ± 1.00 mm
Height=H	0.039 in. to 0.750 in. ± 0.005 in.	1.0 mm to 19mm ± 0.127 mm
	above 0.750 in./19.0 mm consult factory	
Width=W	0.050 in. to 0.079 in. — ±0.006 in.	1.27 mm to 2.00 mm — ± 0.15 mm
	0.080 in. to 0.100 in. — ±0.007 in.	2.03 mm to 2.54 mm — ± 0.18 mm
	0.101 in. to 0.140 in. — ±0.008 in.	2.55 mm to 3.50 mm — ± 0.20 mm
	above 0.140 in./3.50 mm and for custom widths consult factory.	

ZEBRA® Connectors	Temperature Range		Current Carrying Capacity	Resistance
	Minimum	Maximum	0.040" x 0.040" pad	Between Layers
All series	-40°F	212°F	0.005 amps	10 ¹² ohms
	-40°C	100°C		

ZEBRA® SPONGE SELF-SUPPORTED CONNECTORS

The Self Supporting Sponge ZEBRA® connector utilizes standard ZEBRA® connector elements supported by a silicone sponge rubber on one or two sides. The silicone sponge creates a larger width that can eliminate the need for a holder, and yet the force required for deflection is very low. The standard Self Supporting Sponge ZEBRA® connector is available in a host of widths to accommodate LCD's with a glass lip overhang of 0.060"/1.5 mm minimum. The Self Supporting Sponge ZEBRA® connector is used to connect LCD's to printed circuit boards and eliminates bowing of the printed circuit board due to the low force required to make contact.

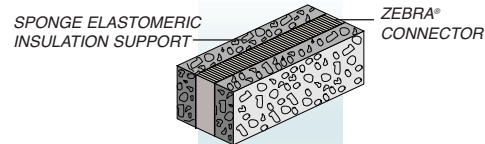

ZEBRA® Element	LCD Contact Spacing in/mm	Standard Connector Widths	
2004 (CZ418)	0.020/0.50	.060 in./ 1.5 mm .087 in./ 2.0 mm	.118 in./ 3.0 mm
1002 (CZ410)	0.010/0.25	.063 in./ 1.6 mm .091 in./ 2.3 mm	.126 in./ 3.2 mm
2005 (CZ405)	0.006/0.15	.067 in./ 1.7 mm .100 in./ 2.5 mm	.138 in./ 3.5 mm
		.070 in./ 1.8 mm .102 in./ 2.6 mm	.150 in./ 3.8 mm
		.075 in./ 1.9 mm .106 in./ 2.7 mm	.157 in./ 4.0 mm
		.079 in./ 2.0 mm .110 in./ 2.8 mm	

Measurement


Tolerance (inches/mm)

Length=L	0.157 in. to 2.40 in. — ± 0.008 in.	4.00 mm to 61.00 mm — ± 0.20 mm
	2.410 in. to 6.00 in. — ± 0.015 in.	61.2 mm to 152.4 mm — ± 0.38 mm
	6.010 in. to 7.87 in. — ± 0.020 in.	152.6 mm to 200.0 mm — ± 0.50 mm
Height=H	0.039 in. to 0.750 in. ± 0.005 in.	1.0 mm to 19mm ± 0.127 mm
	above 0.750 in./19.0 mm consult factory	
Width=W	0.060 in. to 0.157 in. — ±0.004 in.	1.52 mm to 4.0 mm — ± 0.1 mm
	above 0.157 in./4.00 mm consult factory.	

ZEBRA® Connectors	Temperature Range		Current Carrying Capacity	Resistance
	Minimum	Maximum	0.040" x 0.040" pad	Between Layers
All series	-55°F	260°F	0.005 amps	10 ¹² ohms
	-50°C	125°C		

ZEBRA® GOLD 8000 CONNECTORS

The FUJIPOLY ZEBRA® Series 8000 elastomeric connector elements are D-shaped, low durometer silicone elastomer cores around which flat metallic gold-plated conductors are vulcanized in a row parallel to each other. The tips of the metallic conductors are turned upward so that point contact can be effected; in addition, contact is made to the flat area when the connector element is positioned between two printed circuit boards. The point contact will penetrate surface oxides or contaminants which might be present on the surface of the contact pads, thus assuring reliable electrical connection on two planes. Also available are standard board to board assemblies which include connector and holder.

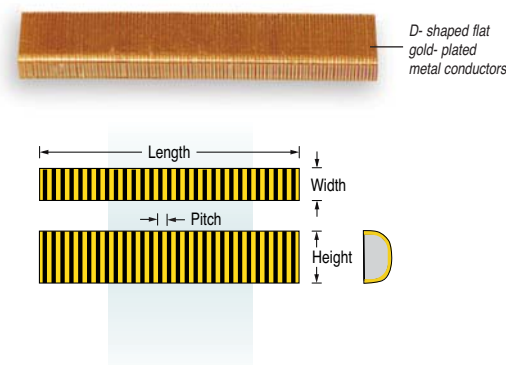

DIMENSIONAL SPECIFICATIONS

Connector Dimensions*	Minimum		Maximum	
Length=L	0.200" ± 0.005"	5.08mm ± 0.127mm	6.000" ± 0.030"	152.4mm ± 0.762mm
Height=H	0.100" ± 0.005"	2.54mm ± 0.127mm	0.500" ± 0.015"	12.70mm ± 0.381mm
Width=W	0.060" ± 0.005"	1.52mm ± 0.127mm	0.125" ± 0.010"	3.18mm ± 0.254mm

Note: For good design practice and low deflection force requirements, the height "H" should be twice the width "W". For other sizes consult factory.

MATERIALS

Connector Component	Materials Used
Conductive Elements	Gold-plated copper wire. gold 0.00025mm (0.00001"), nickel 0.0013mm (0.00005").
Wire Size and Spacing (Series 8000 A,B and C)	A. 0.05mm x 0.127mm (0.002" x 0.005") flat wire on 0.25mm (0.010") center-to-center spacing. (Min. 100 wires/ inch.) B. 0.05mm x 0.10mm (0.002" x 0.004") flat wire on 0.19mm (0.0075") center-to-center spacing. (Min. 133 wires/inch.) C. 0.025mm x 0.076mm (0.001" x 0.003") flat wire on 0.15mm (0.006") center-to-center spacing. (Min. 166 wires/inch.)
Connector body	Non-conductive tan color silicone rubber. UL-94-HB rating, 500 volts/mil dielectric strength.
Film	0.025mm (0.001") thick polyamide dielectric strength of film ASTM-D-149, 2000 volts/mil.

PERFORMANCE CHARACTERISTICS


Parameter	Conditions and Performance
Contact Resistance	Less than 25 milliohms on 0.025" wide contact pads; 0.100 amperes DC, Kelvin- type four probe test method
Insulation Resistance	Minimum 10 ¹² ohms between adjacent conductive elements.
Current Carrying Capacity	Series 8000 A and B, 500 mA per wire max.; Series 8000 C, 250 mA per wire max.
Capacitance	Maximum 0.100 picofarads per adjacent pad at 1 MHz and 0.100" high ("H").
Inductance	Maximum 7 nanohenries per adjacent pad at 1 MHz and 0.100" high ("H").
Repeated Actuations	500 actuations without appreciable change in contact resistance (deflection of 15%).
Deflection	8% to 20%. Recommended deflection 10 to 15% of original height.
Deflection Force/Inch	4lbs. per linear inch for 15% deflection for a 0.062" ("W") x 0.285 ("H") connector.
Operating Temperature Range	-20° C min., 125° C max.
Salt Spray Test	MIL-STD-202E, method 101D, condition B. 5% salt solution 95° F, 48 hours. There was no evidence of blistering or peeling of the contact material.
Temperature Cycling	MIL-STD-202E, method 102A, condition D, -55° C, 25° C, 125° C. There was no change in the physical properties of the specimens.
Humidity (Steady State)	MIL-STD-202E, method 103B, condition C modified. 95% RH room temperature. There was no appreciable change in contact resistance after 500 hours exposure.
Corrosive Environment	1,000 hours exposure at 1 ppm H ₂ S and 1 ppm O ₂ , 60° C AND 75% RH. Slight change in contact resistance; no evidence of contact peeling or blistering.

ZEBRA® Elastomeric Connectors

ZEBRA® FG-S CONNECTORS

The FG-S Connectors have anisotropic conduction properties. Thin metal wires are embedded with a vertical orientation within the silicone rubber on 0.10 mm centers. Low resistance and high current carrying capacity make this series very versatile for most typical interconnect applications.

The basic FG-S design is one row of gold-plated tips of Phosphor Bronze wires embedded in silicone rubber which will connect two parallel sets of contact, both having one row of contact pads.

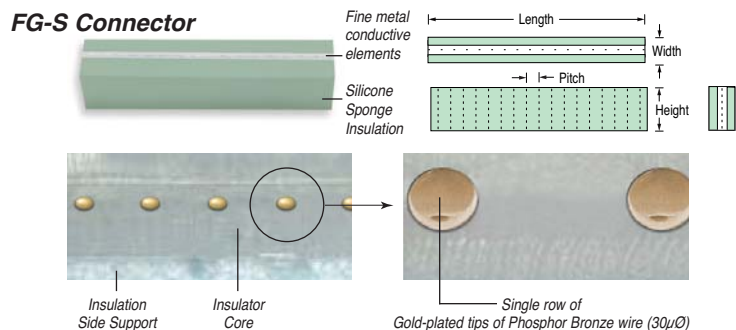

Property	Unit	Measure FG-S			Method
Insulation Material	—	silicone rubber		silicone sponge	—
Color	—	clear or white		blue	Visual
Specific Gravity	g/cm³	1.02		0.74	ASTM D792
Hardness	Durometer A	47		—	ASTM D2240
Tensile Strength	MPa	3		—	ASTM D412
Elongation	%	240		—	ASTM D412
Volume Resistivity	MΩ-m	7.0 x 10⁶		—	ASTM D257
Conductive Material	Type	tips of Phosphor Bronze wire; Gold-Plated			—
Wire Diameter	μm	30			—
Gold-Plated Thickness	μm	0.15			—
Dimensions, Tolerances					
Width (W)	mm .../... in	1.40 to 3.00 ± 0.20 .../... 0.055" to 0.120" ± 0.008"			—
Length (L)	mm .../... in	10.00 to 25.00 ± 0.25 .../... 0.393" to 0.984" ± 0.010"			—
		25.01 to 50.00 ± 0.30 .../... 0.985" to 1.96" ± 0.012"			
		50.01 to 80.00 ± 0.40 .../... 1.97" to 3.14" ± 0.016"			
		80.01 to 120.00 ± 0.50 .../... 3.15" to 4.72" ± 0.020"			
Height (H) (note: H ≥ W)	mm .../... in	1.40 to 4.00 ± 0.10 .../... 0.055" to 0.157" ± 0.004"			—
		4.01 to 10.00 ± 0.15 .../... 0.158" to 0.393" ± 0.006"			
Core: Width (W)	mm .../... in	0.40 ± 0.08/..... 0.016" ± 0.003"			—
Pitch (P)	mm .../... in	0.10 ± 0.05/..... 0.004" ± 0.002"			
Skewness	degrees	2" maximum			
Recommended Dimensions: Connector Height versus Electrode Width and Gap	mm .../... in	Connector Height	Electrode Width	Electrode Gap	—
		min. 1.4 .../... 0.055"	0.21 .../... 0.008" or more	0.21 .../... 0.008" or more	
		2.0 .../... 0.079"	0.22 .../... 0.009" or more	0.22 .../... 0.009" or more	
		3.0 .../... 0.118"	0.24 .../... 0.009" or more	0.24 .../... 0.009" or more	
		4.0 .../... 0.157"	0.25 .../... 0.010" or more	0.25 .../... 0.010" or more	
		5.0 .../... 0.197"	0.27 .../... 0.011" or more	0.27 .../... 0.011" or more	
		6.0 .../... 0.236"	0.29 .../... 0.011" or more	0.29 .../... 0.011" or more	
		7.0 .../... 0.276"	0.31 .../... 0.012" or more	0.31 .../... 0.012" or more	
		8.0 .../... 0.315"	0.32 .../... 0.013" or more	0.32 .../... 0.013" or more	
		9.0 .../... 0.354"	0.34 .../... 0.014" or more	0.34 .../... 0.014" or more	
		max. 10.0 .../... 0.393"	0.36 .../... 0.014" or more	0.36 .../... 0.014" or more	

CROSS-SECTIONAL VIEW

Figure 2 shows the dimensions of the ZEBRA® FG-S Connectors. When ordering, the dimensions should be specified within the limits shown in Table B.




Figure 2

Note: Vertical contact wires may appear at each end of the length dimension, but do not affect performance.
Maximum skewness < 2°

TYPICAL INSTALLATION

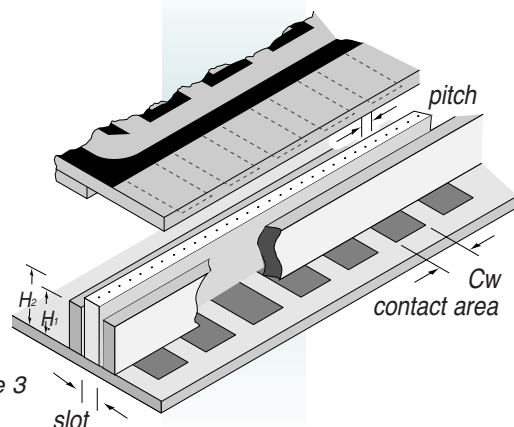


Figure 3


COMPARISON DATA

Measurement	FG-S	Test Condition
Continuity Resistance	0.50Ω/pad (0.25mm Width Pad)	see below
Current Carrying Capacity	30 mA/wire	
Insulation Resistance	> 20 MΩ (Gap=0.25mm)	
Temperature Range	-40° C to +85° C -40° F to +185° F	
Compression Range	5% to 20% H < 3mm, 0.15 ~ 0.60mm H ≥ 3mm consult factory for application specifics	

TYPICAL PERFORMANCE CHARACTERISTICS

FG-S CONNECTOR: COMPRESSION % vs. LOAD AND RESISTANCE

Specimen: Connector FG-S (2mmW x 10mmL x 3mmH)

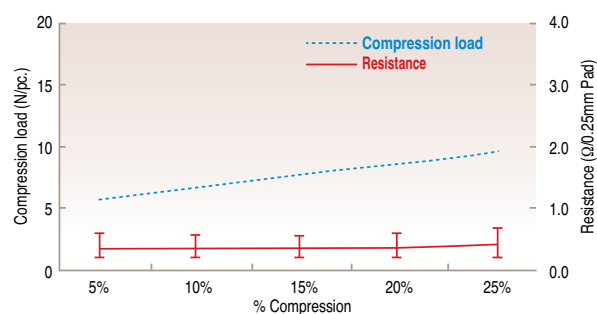

Compression % vs. Force (N/pc.)

%	5%	10%	15%	20%	25%
Aver. N/pc.	5.7	6.6	7.5	8.4	9.6

Resistance vs. Compression % (Ω/0.25mm Pad)

%	5%	10%	15%	20%	25%
Aver. Ω	0.36	0.35	0.35	0.36	0.38
Max. Ω	0.61	0.59	0.59	0.62	0.70
Min. Ω	0.23	0.22	0.22	0.22	0.22

TEST METHOD FOR COMPRESSION % vs. LOAD AND RESISTANCE

Test Method for FG-S Connectors in the charts on this page used the following physical and electrical parameters:

- Electrodes: (Upper) Gold-plated PCB (common type electrode)
(Lower) 0.5mm P, 0.25mm Pad's W, Gold-plated PCB
- Space of electrodes @ 0.25, 50VDC
- Measurement: Digital ohm meter & Compression load meter
- Using Amps: 100mA D.C.
- Condition: Measured at room temperature 30 minutes later



Elastomeric Connectors

ZEBRA® HIGH PERFORMANCE SILVER CONNECTORS

FUJIPOLY low resistance ZEBRA® elastomeric connectors are constructed of alternating parallel layers of electrically conductive and non-conductive silicone elastomer. The electrically conductive layer is filled with silver-metal particles.


The composite alternating layers provide reliable electrical connection when placed between two aligned conducting surfaces.

The low resistance ZEBRA® provides a redundant connection with a minimum of two conductive layers recommended per PC contact pad. The connector is available with insulating barrier or silicone supports (See page 6). The connectors are used for connecting electroluminescent (EL) and plasma type displays to PC boards or for connecting hybrid circuits to PC boards, among other applications.



Alternating parallel layers of non-conductive and silver-filled conductive silicone

Note: For environmental sealing, an insulation barrier or self-support section on each side of the height dimension is recommended. See details on pg. 11 at right.

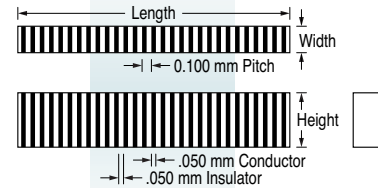

Low resistance ZEBRA® connectors are positioned between two aligned surfaces and are mechanically clamped together with a lid or another PC board. The connectors may be free standing or positioned in a retainer depending on packaging profiles and design.

Series	Contact Spacing Center-to-Center	Pitch: Sum of the Thickness of an Adjacent Conductive and Non-conductive Layer		Conductive Layers per inch	Individual Conductive and Insulating Layer Thickness		Available Lengths
	Minimum	Nominal	Maximum	Minimum	Minimum	Maximum	
5002 (SZ100)	0.015 in. 0.38 mm	0.004 in. 0.100 mm	0.006 in. 0.152 mm	240	0.001 in. 0.025 mm	0.003 in. 0.075 mm	5.00 in. 127 mm

TABLE A (For requirements over 4" consult factory)


Measurement	Tolerance (inches/mm)
Length=L	0.250 ± 0.005 in. to 5.000 ± 0.025 in./..... 6.35 ± 0.12mm to 127.00 ± 0.64mm
Height=H	0.040 ± 0.003 in. to 0.500 ± 0.007 in./..... 1.00 ± 0.08mm to 12.70 ± 0.18mm
Width=W	0.020 ± 0.003 in. to 0.100 ± 0.005 in./..... 0.50 ± 0.08mm to 2.54 ± 0.13mm

TABLE B

ZEBRA® Connectors	Temperature Range Minimum Maximum		Current Carrying Capacity 0.040" x 0.040" pad	Resistance Between Layers
Silver ZEBRA®	-40°F -40°C	185°F 85°C	0.3 amps	10 ¹² ohms

TABLE C

SELF-SUPPORT AND INSULATION BARRIER

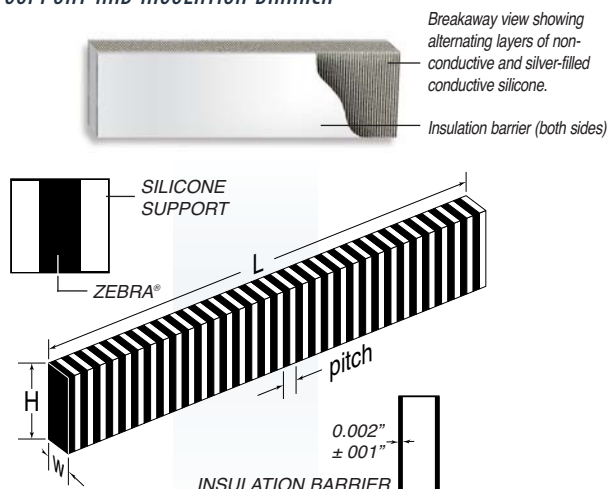

Details show silicone support (left) and insulation barrier (right). Each is available on one or both sides. Configurations may also include support on one side and insulation on the other.

Note: Recommended Height (H) should be twice Width (W) dimension for minimum force deflection. Maximum Skewness 2% of Height.

DESIGN RECOMMENDATIONS

Recommended deflection range is 5-25% of free height. Minimum deflection will vary with packaging applications and should consider overall height, PC board warpage, finish, etc. (Contact FUJIPOLY Product Application Engineering for assistance.) Design recommendations for solid ZEBRA® over 0.400" deflect 0.050" maximum. Silicone supported over 0.400" deflect 0.060" typical.

TEST CONDITIONS:

The use of an insulating barrier or silicone self-support material on one or both sides of the connector is recommended. The silicone support is utilized to reduce clamp force and provide an element of environmental protection for a cost-effective connection.

Item	Standard	Test Method
High Temperature	MIL-202D-108A	85° C 1500 hr
Low Temperature	—	-40° C 500 hr
Moisture	MIL-202D-103B	40° C 95% RH x 500 hr (250mA/pad)
Thermal cycle	MIL-202E-107G	65°C/25°C/150°C/25°C, 5 cycles

NOMINAL RESISTANCE CALCULATION

For the purpose of calculating the resistance of silver ZEBRA® connectors and testing them for compliance please use the following formula:

Where: R = Resistance in Ohms
 W_1 = Width of ZEBRA® portion (inches or mm)
 E_W = Electrode pad width (inches or mm)
 H = ZEBRA® height (inches or mm)

Metric (mm) English (inches)

$$R = \frac{H \times 0.01}{E_W \times W_1} + 0.10 \quad R = \frac{H \times 0.0004}{E_W \times W_1} + 0.10$$

Example: if ZEBRA® is 0.100"/2.54 mm H and 0.030"/0.762mm W_1 , then the maximum resistance on a 0.050"/1.27 mm wide pad will be:

Metric

$$R = \frac{2.54 \times 0.01}{0.762 \times 1.27} + 0.10 = 0.127 \text{ ohms}$$

English:

$$R = \frac{0.100 \times 0.0004}{0.030 \times 0.050} + 0.10 = 0.127 \text{ ohms}$$

NOMINAL FORCE DEFLECTION - PLAIN ZEBRA® OR INSULATION BARRIER TYPE

ZEBRA® connectors should be deflected 5% to 25% of H. To calculate F-Force for deflection, use the following formula:

Where:

F = Force (N)

$$D = \frac{H - H_1}{H} \times 100 (\%)$$

H = Height of connector (mm or inches)

H_1 = Deflected height of connector (mm or inches)

W = Width of connector (mm or inches)

W_1 = Width of ZEBRA portion (mm or inches)

L = Length of connector (mm or inches)

Metric:

$$F(N) = 10.0 \times D \times W \times L \times 9.8 \times 10^{-3}$$

Inches:

$$F(N) = 6452 \times D \times W \times L \times 9.8 \times 10^{-3}$$

NOMINAL FORCE DEFLECTION - SILICONE SUPPORT TYPE

Metric:

$$F(N) = [(10.0 \times D \times W_1 \times L) + \{2.2 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^{-3}$$

Inches:

$$F(N) = [(6452 \times D \times W_1 \times L) + \{1149 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^{-3}$$

ZEBRA® Dummy Elastomeric Connectors

Non-conductive silicone strips made in the same exacting tolerances as the conductive ZEBRA® connectors.

Used in locations adjacent to the active connector to balance the overall leveling and positioning of the display; also to control shock and vibration, and for use as an environmental seal between bezels and LC displays.


Can be installed in the same plane as the connector, and also between the bezel and the display in a variety of easy installation methods.

Consistent dimensional tolerance control assures accurate electronic packaging.

APPLICATIONS:

- LCD and EL display balancing
- Bezel gasket, environmental seal
- Shock, vibration damping

Two types are available which match the mechanical functions of the active ZEBRA® connectors: extruded and closed cell sponge. A range of compression characteristics are available based on the material durometer selections shown below.

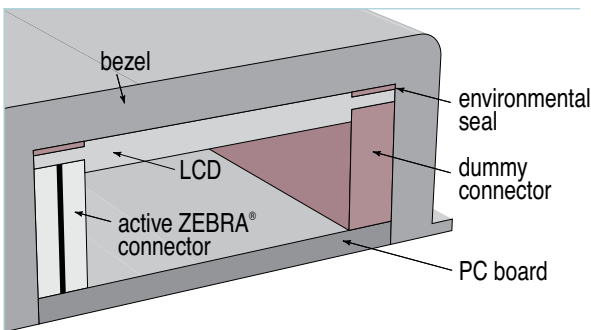

Typical Dummy ZEBRA® installation as an environmental seal and as dummy connector.

Type	Application Guidelines	Dimensions (mm)
Extruded	19 Durometer - translucent	maximum: Length 457.0 Width 152.0 Thickness 0.38min., then in increments of 0.127 up to 1.78
	25 Durometer - pink, blue	
Sponge	20 Durometer - pink	maximum: Thickness 0.38min., then in increments of 0.127 up to 1.78

Custom configurations are also available. For further information, contact Customer Service.

Part Number Nomenclature:

To specify a Dummy connector to your exact requirements, substitute the metric measurements for width, length and height according to the instructions below.

ZEBRA® DC 1.5 x 20 x 1.78 - EXT - 19



Durometer • 10, 19, 20, 25
EXT for extruded • SPG for closed cell sponge
Width
Length
Thickness
ZEBRA® series • DC for Dummy connector

ZEBRA® Series Elastomeric Matrix Connectors

Excellent for **Land Grid Arrays** and similar type interconnects. Extremely accurate silicone rubber electronic connectors with anisotropic conductive properties. A range of 300 to 2,000 fine metal wires per 1 cm² are embedded in the thickness direction of the transparent silicone rubber sheet. The fine metal conductors are gold-plated to ensure low resistance and the ability to withstand a relatively high current flow.

High density and greatly increased number of I/O's are possible; especially beyond 200 connections. Eliminates the costs of soldering and related rework. Facilitates denser and less expensive packaging.


After inserting the correctly sized connector pad between the opposing groups of electrodes, all that is necessary is to apply the appropriate pressure to allow the electrodes to be properly connected.



APPLICATIONS:

- Ball Grid Arrays
- Tape Carrier Packs
- Quad Flat Packs
- Integrated Circuits
- Leadless Chip Carriers
- Printed Circuit Board

FUNCTION:

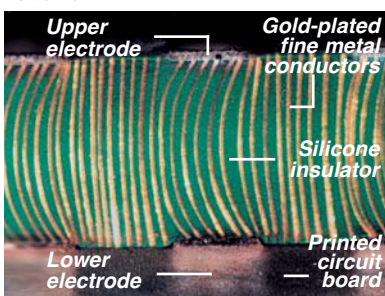

35X magnification side view exhibits compression of fine metal conductors

TYPICAL CHARACTERISTICS:

Measure	Unit	Thickness		Remarks
		0.5	1.0	
Continuity Resistance	Ω -mm ²	0.25	0.45	± 30%
Current Density	mA/mm ²	500		N/A
Resistance Between Adjacent Conductors	Ω	10 ¹⁰ or more		C pattern p = 0.35
Light Transmission	%	90		1.0 mm thick L pattern p = 1.0
Operating Temperature	°C	-20 to +100		N/A

W Series	Pitch (P)	Pattern Side View	Pattern Plan View	Thicknesses	Applied Electrode Gaps	Suitable Electrodes Width - Length	Maximum Dimensions Length Width	Applications
WSL	1.0			0.50mm	over 0.4	over 0.3 over 1.5	76.0mm 5.0mm	Combination type
				1.00mm	over 0.5	over 0.5 over 1.5		
WSC	0.35			0.50mm	* (over 0.6) over 0.6	(over 0.7) over 0.9 (over 0.9) over 0.9	50.0mm 50.0mm	Matrix type electrode
				1.00mm	(over 0.7) over 0.7	(over 0.7) over 0.9 (over 0.9) over 0.9		
WBC	0.35			0.50mm	(over 0.6) over 0.6	(over 0.7) over 0.9 (over 0.9) over 0.9	50.0mm 50.0mm	Matrix type electrode
				1.00mm	(over 0.7) over 0.7	(over 0.7) over 0.9 (over 0.9) over 0.9		

Notes: (1) The **WSL** and **WSC** types have straight metal conductors protruding slightly from both top and bottom of the silicone rubber sheet to ensure perfect connections with slight pressure. Designed for mounting applications.

(2) The **WBC** type has curved fine metal conductors embedded in a silicone rubber sheet which are flush with the top and bottom planes. The curved configuration facilitates repeated compressions. Ideal for inspection applications.

* The upper: 12.5mm x 12.5mm product

The lower: 25mm x 25mm, 37.5mm x 37.5mm or 50mm x 50mm product

Part Number Nomenclature:

WSL-102-2.0 x 20.0 x 0.5

Thickness (mm)
Length (mm)
Width (mm)
Number of conductors
(rows are numbered 1 through 5)
Pitch
Conductor Pattern • L
Type • WS: Fine metal wire straight

WSC-035-5.0 x 20.0 x 0.5

Thickness (mm)
Length (mm)
Width (mm)
Pitch • 035 = 0.35
Conductor Pattern • C pattern
Type • WS: Fine metal wire straight
• WB: Fine metal wire curved

ZEBRA® Bezel and Connector Assemblies

Fujipoly® LCD connector assemblies with clear bezels provide an attractive and reliable way of mounting LCD's onto a PC board. Electrical connection between LCD and PC board contact surfaces is made by two Series 2004 ZEBRA® connectors, which consist of alternating parallel layers of conductive and non-conductive silicone rubber repeating on a 0.18mm (.007") pitch.

Because the LCD is mounted on rubber components, the assembly provides shock and vibration protection for the display. The clear bezel introduces an extra measure of protection for the LCD.

APPLICATIONS:


- Flat Mount Dual Inline LCD's
- Clocks, Meters, Calculators, Appliances, Automotive Dashboards, Gas Pumps, Industrial Displays, Instrumentation, Computing Devices.

Flat Mount LCD connectors are designed to mount Dual Inline LCD's flat onto printed circuit boards without pins or soldering. The connectors consist of two ZEBRA® connectors inserted into a specially designed plastic holder. See pages 2 through 11 for specific connector selection information. The retainer positions the LCD and aligns it with the printed circuit board contacts via two locating studs. A gas tight environmental seal is created when the ZEBRA® connectors are deflected between the LCD and the printed circuit board when the bezel is tightened into position.

COMPATIBILITY:

The operating temperature range for the connector assembly exceeds that for the LCD. The ZEBRA® connectors provide a gas-tight seal of the contact surfaces to assure reliable operation in hostile environments. The bezel protects the LCD polarizer from scratches and may be used directly in the window provided in the instrument enclosure.

operating temperature	-40°C to 95°C (-40°F to +203°F)
storage temperature	-56°C to 95°C (-65°F to +203°F)
nominal resistance	1000 ohms
humidity range	0 to 100% R.H.

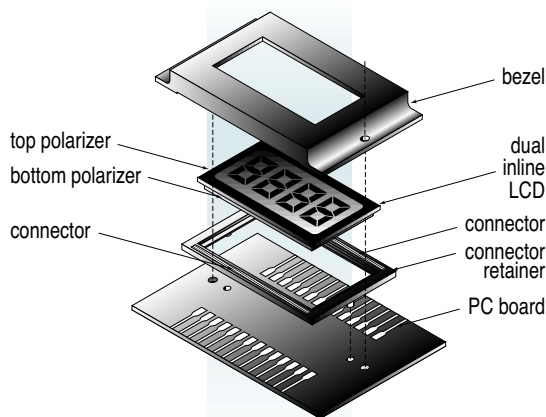


Dual Inline assembly with two ZEBRA® connectors.

The connector assembly consists of a retainer, two ZEBRA® connectors, viewing area mask and, if required, a bezel. Assembly is simple: place the retainer on the PC board using the locating studs for alignment, insert the ZEBRA® connectors, LCD, and mask and secure the bezel with two screws. The LCD connectors are available in one basic configuration for Dual Inline Displays where the viewing area is in the center.

A complete range of sizes accommodate LCD's up to 1.50" x 2.75" (38.10 x 69.85 mm). For dimension details, find assembly part number below and match with bezel and retainer component information on opposite page.


Assembly Number	For LCD Size	Bezel Mask Color	Bezel & Retainer Information
09-10050	13.72 x 23.88 0.54 x 0.94	none clear	Refer to opposite page for details
09-19137	30.50 x 50.80 1.20 x 2.00	black clear	
09-10103	30.50 x 50.80 1.20 x 2.00	black clear	
09-19102	30.50 x 50.80 1.20 x 2.00	none black	
09-19143	30.50 x 69.85 1.20 x 2.75	black clear	
09-10067	38.10 x 69.85 1.50 x 2.75	black clear	

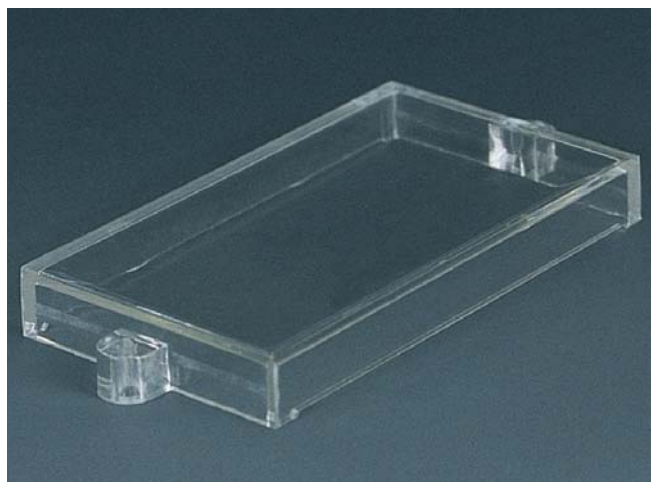


Bezel for 09-19137 shown.

LCD BEZELS AND MASKS

Easy to assemble bezel with viewing area mask slips over the LCD and over the connector retainers shown below. The scratch resistant, tough acrylic face may be used directly in the window provided for end use without a separate face cover.

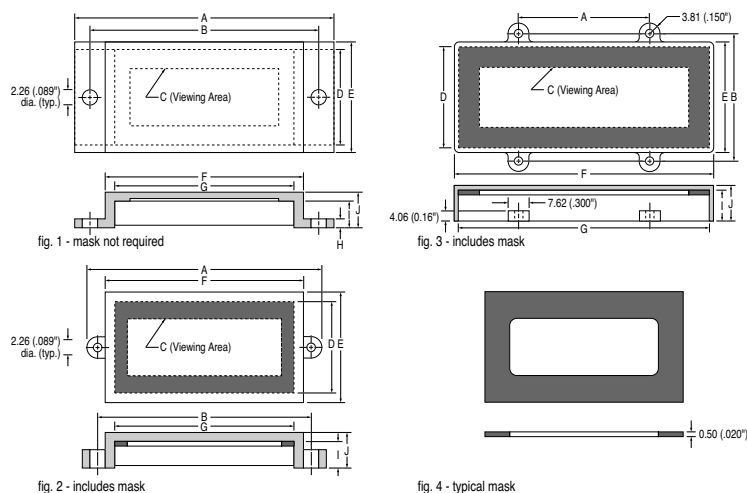


Bezel & Mask Details for Connector Assembly No.	Ref. Figure	Bezel Color	Viewing Area									
			A	B	C	D	E	F	G	H	I	J
09-10050	fig. 1	clear	37.85 1.490	33.53 1.320	22.61x8.64	.890x.340	13.92 .550	16.51 .650	29.21 1.150	26.67 1.050	1.27 .050	3.82 .150
09-19137	fig. 2	clear	68.07 2.680	61.89 2.437	45.72x19.05	1.800x.750	30.94 1.218	33.47 1.318	57.60 2.268	54.73 2.155	n/a	5.84 .230
09-10103	fig. 2	clear	68.07 2.680	61.89 2.437	45.72x19.05	1.800x.750	30.94 1.218	33.47 1.318	57.60 2.268	54.73 2.155	n/a	5.84 .230
09-19102	fig. 1	black	73.96 2.912	67.56 2.660	48.46x20.32	1.908x.800	30.61 1.205	33.20 1.307	61.26 2.412	54.51 2.146	1.40 .055	5.08 .200
09-19143	fig. 3	clear	44.35 1.746	38.32 1.509	64.77x17.78	2.550x.700	30.86 1.215	33.60 1.323	76.53 3.013	73.91 2.910	n/a	8.35 .329
09-10067	fig. 3	clear	44.45 1.750	45.47 1.790	60.96x21.59	2.400x.850	38.65 1.522	41.40 1.630	76.71 3.020	73.91 2.910	n/a	8.51 .335

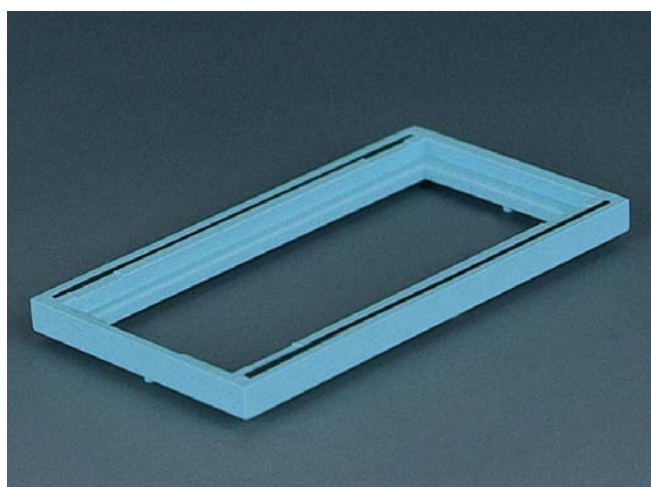

Bezel for 09-19137 shown.


ZEBRA® CONNECTOR RETAINERS

Standard connector retainers include two ZEBRA® series 2004 silicone rubber connectors with alternating conductive and non-conductive parallel layers, each on a 0.18 mm (.007") pitch for dual inline LCD applications. Provides a tight environmental seal with shock and vibration protection for the display. Two locating studs on bottom facilitate assembly.

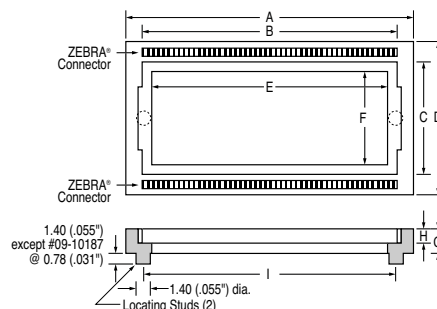

Connector Retainer Details for Connector Assembly No.	A	B	C	D	E	F	G	H	I	Fits Bezel Style Above
09-10050	26.57 1.046	24.02 .946	10.29 .405	13.72 .540	24.02 .946	10.29 .405	2.54 .100	1.65 .065	23.80 .937	fig. 1
09-19137	54.36 2.140	51.30 2.020	24.13 .950	30.50 1.200	47.24 1.860	20.57 .810	3.43 .135	1.78 .070	50.80 2.000	fig. 2
09-10103	54.36 2.140	51.30 2.020	24.13 .950	30.50 1.200	47.24 1.860	20.57 .810	3.43 .135	1.78 .070	50.80 2.000	fig. 2
09-19102	54.40 2.142	51.30 2.020	23.52 .926	30.50 1.200	47.24 1.860	20.57 .810	3.43 .135	1.91 .075	50.80 2.000	fig. 1
09-19143	75.53 2.895	70.71 2.784	24.13 .950	30.50 1.200	65.91 2.595	20.07 .790	6.35 .250	1.91 .075	69.85 2.750	fig. 3
09-10067	75.53 2.895	70.71 2.784	31.87 1.255	38.10 1.500	65.91 2.595	27.69 1.090	6.35 .250	1.91 .075	69.85 2.750	fig. 3

ZEBRA® Design Guidelines - Connectors

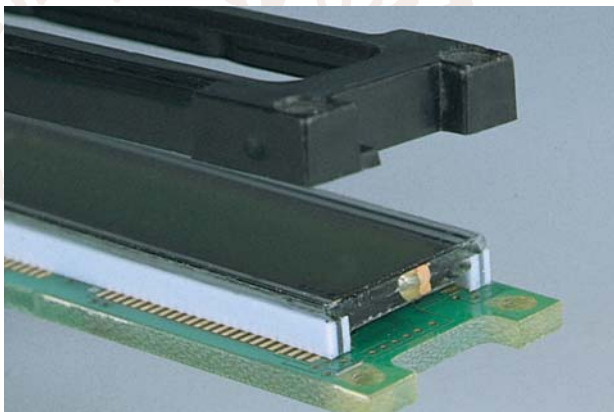


Micro-electronics interconnect packaging applications by their very nature leave a minimum of space in which to assemble mating components. High reliability and very small interconnections, with an ever-increasing number of I/O's, are a must if design objectives are to be met. ZEBRA® connectors can be found in most product types of this nature, and continue to gain wider acceptance as product packages decrease in size. Since each style consists of integral conductors, insulators and self-support structures, there is generally no added componentry required for installation – thus a very important by-product of hardware and installation cost-effectiveness can be realized.

AS EASY AS 1...2...3: Using ZEBRA® elastomeric electronic connectors requires only a brief orientation in order to assure that the components provide the finest performance possible. The basic design steps consist of:

1. Layout of your package
2. Select the proper connector and size
3. Design the bezel or retainer

DESIGN FEATURES AND CHARACTERISTICS

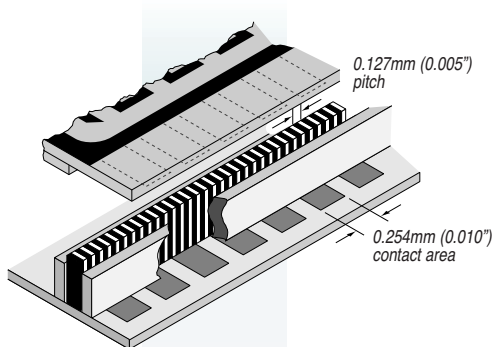

ZEBRA® connectors are composed of alternating layers of conductive and non-conductive silicone rubber. Contact density of the ZEBRA® connector is greater than the contact pad density of either the LCD or PC board, making it an ideal design choice. When placed between the LCD and PC board at least one conductive layer will connect matched contact pads and at least one insulating layer will isolate adjacent circuits.

SOLDERLESS CONNECTIONS NON-ABRASIVE CONTACTS

Pressure type contact eliminates lead straightening, hole drilling and soldering. (Zero insertion force) Contact to the LCD is made by deflecting the ZEBRA® connector between the LCD and PC board. ZEBRA® connectors are non-abrasive and will not damage indium oxide contact pads on the LCD. Repeated assembly and disassembly of package components will not affect performance.

ENVIRONMENTAL RELIABILITY

The LCD, when mounted with a ZEBRA® rubber connector, creates a gas tight seal at the contact interface. Assures contact in chemically corrosive atmospheres while at the same time protecting the glass display from shock and vibrations.

SMALL GLASS OVERHANG

With a ZEBRA® connector, LCD terminal overhangs can be as narrow as 0.030"/8mm permitting more efficient use of glass size related to character height. (Metal pins normally require a 0.150"/3.9mm glass overhang, reducing character height by as much as 0.240"/6.1mm for a dual in-line LCD.)

HIGH DENSITY CONTACT

ZEBRA® connectors are available in a variety of contact densities. The most dense allows contact pad spacing as close as 0.010"/0.25mm center-to-center. This spacing can be compared to 0.050"/1.3mm minimum for pins, allowing for increased capacity of LCD formats.

TEMPERATURE RANGE

-55° TO +260° F/-50° C TO +125° C (-60° TO +125° C available on request)

CURRENT CARRYING CAPACITY

40 amps per square inch of contact pad. (0.050A for .035 x .035 pad)

CONNECTION RESISTANCE

Typically 500 to 2,500 ohms.

INSULATION RESISTANCE

Typically 10¹² ohms.

DEFLECTION FORCE REQUIRED

1.5 pounds per linear inch for a 0.020" wide ZEBRA®.


LIFE

100,000 hours minimum.

CONDUCTIVE LAYERS

up to 500 per inch.

PHYSICAL AND ELECTRICAL MEASUREMENTS - NOMINAL

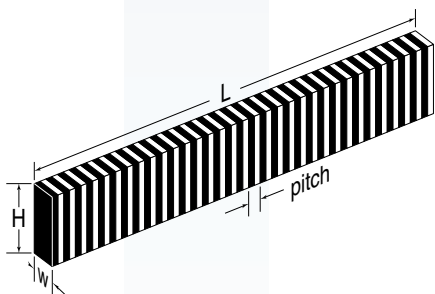

DIMENSIONS - The above figure shows the dimensions of the ZEBRA® connector. For best overall performance ZEBRA® connectors should be designed with an aspect ratio of H/W equal to or greater than 1.5.

MECHANICAL - FORCE DEFLECTION - Recommended deflection is 5% to 25% of the height (H) dimension. To calculate F (force in pounds) for deflection the following formula may be used:

For Carbon ZEBRA®s

$$\text{Metric: } F = 9 \times D \times W \times L \times 9.8 \times 10^3$$

Inches:

$$F = 5806 \times D \times W \times L \times 9.8 \times 10^3$$

For Silver ZEBRA®s

$$\text{Metric: } F = 10.0 \times D \times W \times L \times 9.8 \times 10^3$$

Inches:

$$F = 6452 \times D \times W \times L \times 9.8 \times 10^3$$

Where:

F = Force (N)

$$D = \frac{H - H_1}{H}$$

H = Height of connector (mm or inches)

H₁ = Deflected height of connector (mm or inches)

W = Width of connector (mm or inches)

L = Length of connector (mm or inches)

RESISTANCE - To calculate the resistance of ZEBRA® connectors, choose one of the following formulas:

For Carbon ZEBRA®s

$$\text{Inches: } R = \frac{2.37 \times H}{E_W \times W} = \text{ohms}$$

Where:

E_W = Electrode pad width (in)
W = Connector width (in)
H = Connector height (in)

$$R = \frac{60 \times H}{C_W \times W} = \text{ohms}$$

Metric:

Where:

E_W = Electrode pad width (cm)
W = Connector width (cm)
H = Connector height (cm)

For Silver ZEBRA®s

$$R = \frac{H \times 0.0004}{W \times E_W} + 0.10 = \text{ohms}$$

Where:

W = Width of ZEBRA® (in)
E_W = Electrode pad width (in)
H = Height of ZEBRA® (in)

$$R = \frac{H \times 0.01}{W \times E_W} + 0.10 = \text{ohms}$$

Metric:


Where:

W = Width of ZEBRA® (mm)
E_W = Electrode pad width (mm)
H = Height of ZEBRA® (mm)

ENVIRONMENTAL SEALING

The ZEBRA® connector will provide a gas tight seal. Adverse effects of temperature, shock and vibration, atmospheric corrosion as well as harsh chemical environments will not affect LCD or PC board contacts, when sealed through use of a ZEBRA® connector.

ZEBRA® Design Guidelines - Connectors

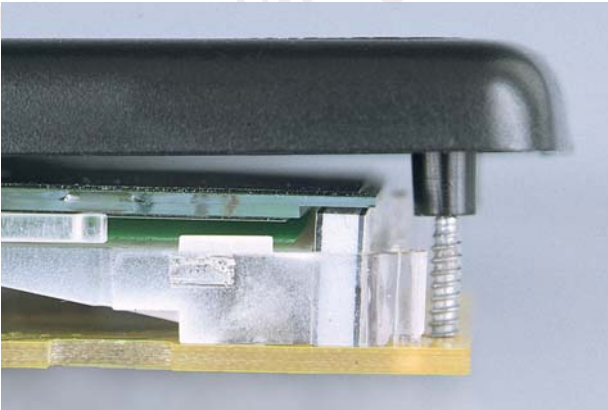


1. LAYOUT OF YOUR PACKAGE:

Shown at left is a typical LCD-to-printed circuit board interconnect using ZEBRA® elastomeric connectors in a cellular telephone handset. The components are stacked and consist of only three items to be addressed:

Liquid Crystal Display (LCD)
ZEBRA® connector
Printed Circuit Board (PCB)


It is essential that contact mating characteristics be kept as similar to the other components as possible. Any factors restricting positive contact interface should be compensated for in the design. Some of these are as follows:

1.1 PRINTED CIRCUIT BOARD DESIGN CONSIDERATIONS

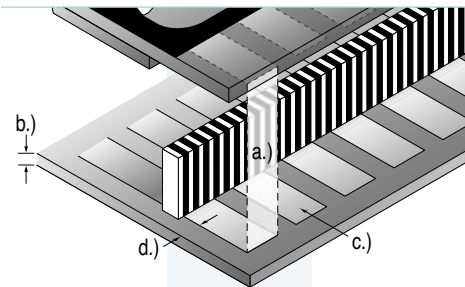


- a.) **Registration of contact pads** between the LCD and PC board is critical in effecting contact. Contact pads of both should ideally be of the same size and equally matched in tolerances for width and pitch.
- b.) **Consider carefully PC board thickness** and the related flatness tolerances. Proper design should involve the control of "waviness" tolerances and board stiffness. Both elements are essential in the appropriate design and selection of the ZEBRA® connector. Connector deflection and width are important considerations in determining the size of the ZEBRA® connector to be used in order to maintain proper deflection without "bowing" the PC board.
- c.) **Contact pad material** on the PC board, as well as the LCD, should be smooth and regular with thickness tolerances established.
- d.) **Consider the area on the PC board** to be dedicated to the LCD and the presence of neighboring components. Location of the LCD above or on the PC board should permit free clearance on all four sides of the PC board profile of at least 0.250"/6.2mm for packaging and/or fastening.

1.2 LCD DESIGN CONSIDERATIONS

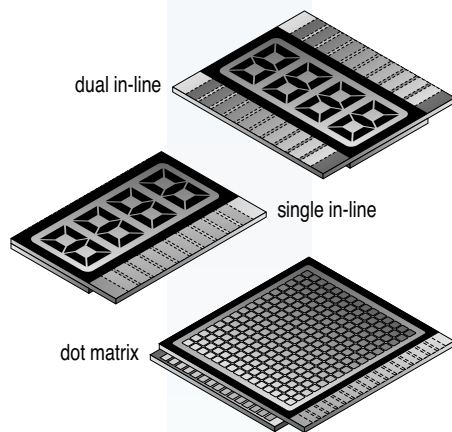

- a.) **Select LCD configuration**, e.g., Single In-Line (SIL); Dual In-Line (DIL); or contacts on both planes. Example: Dot Matrix.
- b.) **Select an LCD** which in its design has contact pads on the reverse side of the viewing area (facing PC board). For those instances where contact pads cannot be stationed facing the PC board, a custom elastomer may be required.
- c.) **Pitch** of LCD contact pads.
- d.) **Length, width, and thickness** of combined front glass and back glass of LCD.
- e.) **Determine lip width** (distance from outside edge of front glass to edge of back glass). This dimension should be at least 0.060"/1.5mm and preferably 0.100"/2.5mm. Ideally, contact pads should extend to the outer edge of the lip on the glass.


1.3 CALCULATING THE SEPARATION FACTORS

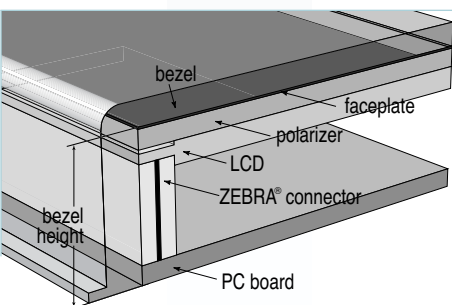

Consideration must be given to tolerance control on the elements that comprise the connector package. There are separate flatness and parallelism tolerances for the LCD glass, polarizers, reflectors and PC board. Materials used for the contact pads of the LCD and contact pads of the PC board also have thickness variations which must be considered. Flatness of the PC board and parallelism between the components are also factors. These tolerance values are vital criteria in determining separation variations between the LCD and PC board. The sum of the tolerances of these elements plus nominal separation determine the height (H) of the connector which will meet your design application.

ZEBRA®

Design Guidelines - Connectors

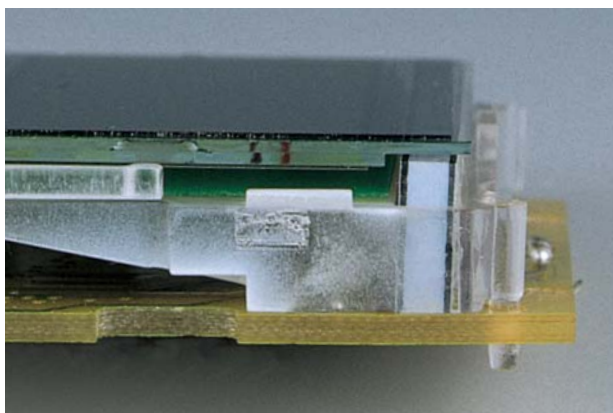


2. SELECT THE CONNECTOR AND SIZE

ZEBRA® elastomeric connectors offer a wide variety of application possibilities, in many cases where no other type of interconnect device is possible. They require a minimum of installation hardware considerations, allowing for very small packaging structures to support low profile display and microelectronic interfacing.


When properly dimensioned, long-life performance can be assured and gas-tight connections without additional precautions can be realized.

2.1 CONNECTOR PITCH AND LENGTH

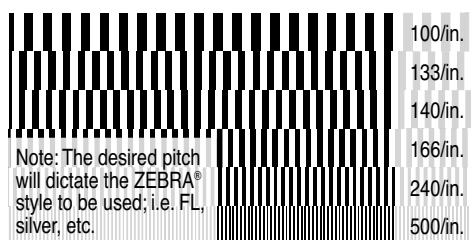

- Select a ZEBRA® connector that will assure that at least one conductive layer connects between contact pads**, for example, of an LCD and PC board to be interconnected, and at least one insulating layer is between adjacent contact pads.
- ZEBRA® connectors can accommodate** applications with contact spacing of .010"/.254 mm center-to-center or greater.
- The overall length** should extend a minimum of 0.020" beyond the edge of the contact at each end of the connector.


2.2 CONNECTOR HEIGHT

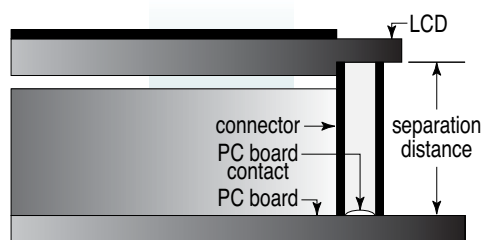

- ZEBRA® connector height** is determined by the separation distance between LCD and PC board contact pads, including tolerance variations. ZEBRA® connectors can be supplied with a height of up to 1"/25mm.
- ZEBRA® connector height** is the most critical dimension in determining the functional performance of the connected components. Calculate the tolerance stack-up of the PC board, LCD, polarizer, and ZEBRA®. Multiply the maximum separation distance by 1.10 (adding 10% to separation distance) to establish uncompressed ZEBRA® connector height.
- The following example** shows calculations used in determining uncompressed ZEBRA® connector height.


Example: Separation distance in this application equals 0.200"/5.08mm with tolerance of +/- 0.005"/0.13mm representing the tolerance stack-up from one end of the LCD and PC board separation to the other end. The minimum separation in our application equals 0.195"/4.9mm; the maximum separation equals 0.205"/5.2mm. Multiply the maximum separation of 0.205"/5.2mm by 1.10 to develop the uncompressed ZEBRA® connector height. The resulting 0.225"/5.7mm uncompressed height of ZEBRA® connector is the correct ZEBRA® connector height to assure adequate contact and achieve the minimal 0.195"/4.9mm separation for assembled height of the LCD, PC board package, and to insure contacts in areas where the minimum separation of 0.195"/4.9mm prevails. To achieve the 0.200"/5.08mm assembled height, it is necessary to deflect the 0.225"/5.7mm free height ZEBRA® connector by 10%. The design result falls within the 5%-25% deflection range recommended for effective ZEBRA® connector contact.

2.3 CONNECTOR WIDTH

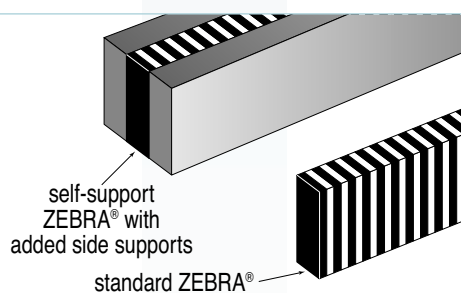

- Force deflection** considerations of the ZEBRA® connector (Refer to Force Deflection formula) result in a recommendation of 0.025"/0.6mm as the width for connectors of lengths between 0.25"/6mm and 2.5"/63.5mm. Continuous connector spans of 2.6"/66mm to 8"/203mm require a minimum 0.035"/0.9mm wide connector to allow easy assembly of the ZEBRA® connector into the slot of a holder. Ideally, the ZEBRA® connector length should be limited to 2.5"/63.5mm due to possible insertion difficulties of the connector in the slot of the holder.
- ZEBRA® connectors with a width of 0.025"/0.6mm to 0.035"/0.9mm** require the use of a holder. (See design of ZEBRA® connector holder.) Fujipoly offers standard self-supporting ZEBRA® connectors eliminating the need for fabricating a holder for heights up to 0.200"/5.08mm.

Design Guidelines - Connectors

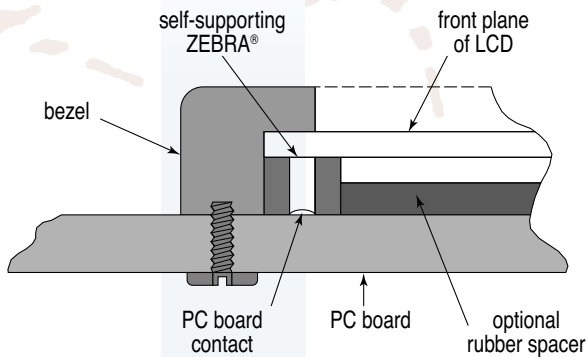

3. DESIGNING THE CONNECTOR HOLDER

Once the ZEBRA® style and design have been decided upon, two last considerations should be resolved; namely:

- Support of the ZEBRA® connector in its operating position
- Application of pressure onto connector height dimension to cause deflection and proper contact to the conductive contact pads.


The most common alternatives are among the following:

A Self-Supporting ZEBRA® connector

A Custom Holder - for your specific configuration

Clamping or fastening devices

3.1 STANDARD SUPPORTED SIZES

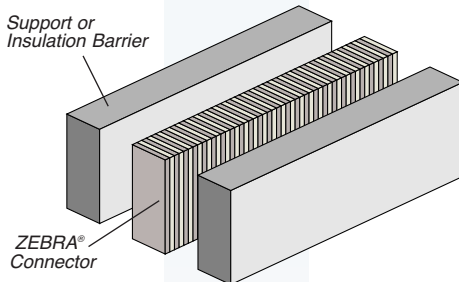


The supported connector typically contains a thin elastomeric 0.020"/.51mm wide strip attached to either one or both sides. It is a sponge or solid silicone rubber support medium which allows a lower compression force over a wide range while also providing a greater width-to-height ratio. Thus, the free-standing stance is more stable, especially as compression is introduced.

Carbon and Silver Filled Standard Dimensions (in./mm)

	min.	max.
width	0.050/1.27	0.157/3.44
height	0.050/1.27	1.000/25.4
length	0.250/6.35	9.000/229.0 carbon; 5.000/127.0 silver

3.2 DIMENSIONING A STANDARD OR CUSTOM CONNECTOR HOLDER

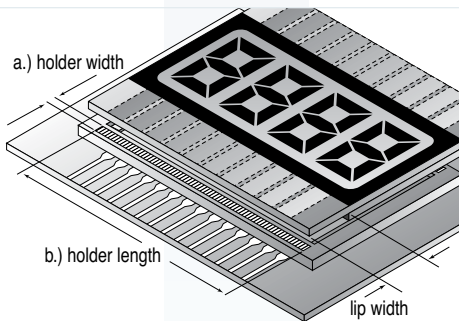

a.) **Holder/Retainer width:** Determine LCD lip width as well as clearance on the PC board allowed to accommodate the LCD.

b.) **Holder length:** Holder should extend a minimum of 0.1"/2.5mm beyond the edges of the front of the glass of the LCD and/or the PC board pad lengths in order to provide support, and proper positioning and placement of aligning pins of the holder. Where wall thickness of the holder must be thin and length of contact area is in excess of 2.5"/63.5mm, it may be necessary to provide a bridge or separator in the holder slot at 2.5"/63.5mm intervals, or the wall thickness of the frame on either side of the slot must be adequate to inhibit inward "bowing". Design considerations should preclude such bridges or separators from interfering with the contacts designed to be between LCD and PC board.

The difference between slot width and ZEBRA® width should be approximately 0.005"/0.13mm to allow for easy insertion and removal.


c.) **The following design considerations should be evaluated:**

Plastic Holders: Reinforced plastic is preferable because it affords superior physical and electrical design properties. Temperature range of LCD should be consistent with temperature specifications of plastic selected. Chamfer the slot in the holder as shown in the illustration. Add 0.005"/0.13mm to the width of the slot for insertion of the ZEBRA® connector. Allow a minimum of 0.050"/1.3mm wall thickness or greater as height approaches 0.150"/3.8mm. Locating pins should be molded to bottom of ZEBRA® connector holder to provide registration between LCD and the PC board contacts. See Figure #1.

Metal Holders: In designing metal holders, specify an insulating barrier or supports on the sides of the ZEBRA® connector to assure electrical insulation to eliminate shorting, etc.

Locating pins: Should be provided on the ZEBRA® connector holder to provide registration between LCD and PC board contacts. Check with the LCD manufacturer regarding the glass seal in designing either plastic or metal holders. Provide room in the ZEBRA® connector holder for the seal. Provision should be made to accommodate loose polarizers and reflectors if such elements are included in the design.


3.3 DESIGNING THE BEZEL

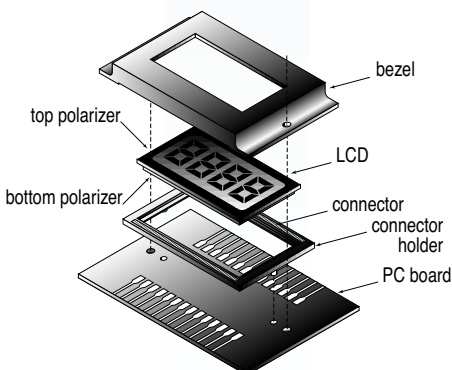

In determining design requirements for the bezel, specific design elements should be considered:

- Using separation distance factors,** determine required height of the bezel. Length and width of the LCD plus holder tolerances will establish length and width dimensions.
- Must the LCD be protected?** If so, the bezel should incorporate a cover element.
- Is sealing required** to prevent dust and/or moisture intrusion? Under what environmental conditions will the LCD be expected to function?
- What is the LCD viewing area?** Be sure that bezel edges do not interfere.
- Is masking required** for any portion of the LCD viewing area?
- Can the housing or case of the end product be used to provide the necessary pressure** and protection required for the LCD/PC board connection? If so, a bezel may not be necessary.
- Will there be a need for clamps or fasteners?** Consult Fujipoly as a design reference source for bezel configurations.

ZEBRA® Design Guidelines - "W" Matrix Connectors

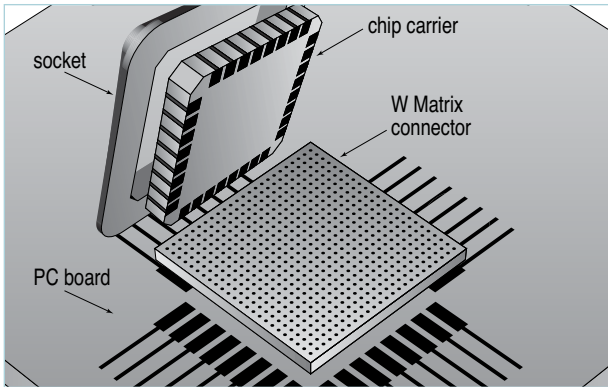


The ZEBRA® W series elastomeric connectors are highly accurate silicone rubber pads with fine metal wires embedded in the thickness direction. The wires are gold-plated, providing low resistance and relatively high current flow with anisotropic conduction properties.

Standard pitch patterns offer dense I/O's at closely positioned centerlines. To specify the appropriate design layout for your application, the following simple steps are recommended:


1. Determine the pitch
2. Decide if interconnect is static or repeated compressions
3. Specify overall dimensions

1. DETERMINING IF THE APPLICATION IS STATIC OR REQUIRES REPEATED COMPRESSIONS

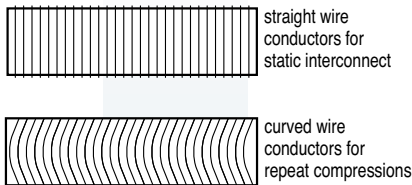


- a.) **Static interconnect** between mating conductors use the WSL (1.0mm pitch) or WSC (0.35mm pitch) versions. The fine wire conductors protrude slightly from both top and bottom of the silicone rubber to ensure contact with conductors under just very slight pressure (about 10% compression).
- b.) **Repeated compression interconnects** such as testing pads use the WBC (0.35mm pitch) version containing curved conductors with spring properties which allow the connector to recover to original height without compression set after repeated deformations.

2. DETERMINE PITCH REGISTRATION

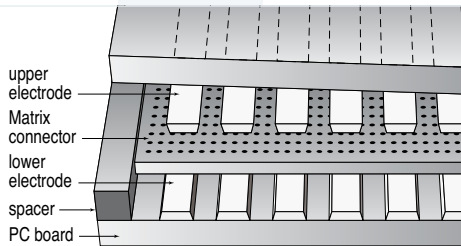

- a.) **Pitches available:** 1.0mm and 0.35mm for "W" series; and, 1.0mm, 0.8mm and 0.5mm for "P" series
- b.) **Select the pitch** which assures that at least one conductor connects between the contact pads to be mated, and that at least one insulating area is between adjacent contact pads.
- c.) **If redundant contact is desired**, select the pitch that assures at least two conductors connect between the contact pads to be mated and at least one insulating layer is between adjacent contact pads.

3. DETERMINE EXTERIOR DIMENSIONS

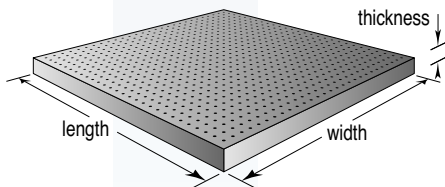

- a.) **Length** - allow an additional 0.5mm (.020") beyond the edge of the conductor at each end of the row in the length direction. Maximum length is 40.0 mm
- b.) **Width** - allow an additional 0.5mm (.020") beyond the edge of the conductors at each end of the row in the width direction. Maximum width is 20.0 mm
- c.) **Thickness** - two thicknesses are available for each style of "W" connector: 0.5 and 1.0mm. Allow 10% compression of original height to achieve reliable contact. Consider using a compression stop spacer (see drawing) to control compressed height. More than 20% compression is not recommended.

REFERENCE - TYPICAL ENVIRONMENTAL TESTING CHARACTERISTICS

Test	Method	Description	Connector Results		
			Live Current	Embedded in Circuit No Current	Not Embedded No Current
Accelerated Moisture Resistance	MIL-202D-106c	Test cycle: -20°C/23°C/65°C, 95% RH, 1 Test cycle/day x 10 days	—	No change	No change
Moisture	MIL-202D-103B	40°C @ 95% R.H. Continuous 1500 hours	No change	No change	No change
Thermal Shock	MIL-202E-107D	Test cycle: -65°C/25°C/150°C/25°C, 5 cycles	—	No change	No change
SO ₂ Gas Corrosion	MIL-IEC-68-2-42	SO ₂ gas, 25PPM, 25°C 75% RH, 21 days	—	No change	0.20/0.35 Ω-mm ²
Thermal Resistance	MIL-202D-108A	120°C, 500 hours	—	No change	No change

FUJIPOLY® LOCATIONS

Fuji Polymer Industries Co., Ltd.

Sales Department
175 Kajiyashiki,
Toyota, Aichi 4700533 JAPAN
tel: 81-565-65-1729 fax: 81-565-65-1857
e-mail: fujipoly@mx.fujipoly.co.jp
ISO9001 (Aichi Plant)

Fujipoly America Corp.

900 Milk Street
P.O. Box 119 • Carteret, NJ 07008-0119
tel: 732.969.0100 fax: 732.969.3311
e-mail: info@fujipoly.com
web site: www.fujipoly.com
ISO9001-2008   

Fujipoly (Thailand) Co., Ltd.

55/8 Moo 13 Navanokorn Industrial Estate Phase 4
Phaholyothin Road, Klong Nueng, Klong Luang
Pathumthanee 12120 Thailand
tel: 66-2-529-2732 fax: 66-2-529-2223
e-mail: marketing@fujipoly.co.th
ISO9001 ISO14001

Fujipoly Europe Ltd.

Avant Business Centre, Unit 8
Third Avenue
Bletchley, Milton Keynes MK1 1DR U.K.
tel: 44-1-908-277800 fax: 44-1-908-277900
e-mail: sales@fujipolyeurope.co.uk

Fujipoly Singapore Pte, Ltd.

1001 Jalan Bukit Merah #02-17/20
Singapore 159455
tel: 65-6272 3766 fax: 65-6272 3577
e-mail: info@fujipoly.com.sg
ISO9001

Fujipoly Hong Kong Ltd.

Unit F & J, Block 1,4/FI.
Kwai Tak Industrial Centre
15-33 Kwai Tak Street, Kwai Chung, N.T., Hong Kong
tel: 852-24283770 fax: 852-24899637
e-mail: info@fujipoly.com.my

Fujipoly Malaysia Sdn.Bhd. (Malaysia Factory)

Plot 26, Phase 4, Free Industrial Zone, Hilir
Sungai Keluang3,
Bayan Lepas Penang, 11900 Malaysia
e-mail: info@fujipoly.com.my

Fujipoly China Ltd. (China Factory)

Gaobao Road, The First Industrial Park
Tutang Estate, Changping Town, Dongguan City,
GuangDong, 523581, China
tel: 86-769-83989660 fax: 86-769-83989662
e-mail: info@fujipoly.com.hk
ISO9001 ISO14001

Fuji Polymer Industries Co., Ltd.

Taipei Liaison Office
Room B, 7F., No. 59, Tiansiang Rd.
Jhongsan District
Taipei City 10452, Taiwan
tel: 886-2-2586-5771 fax: 886-2-2586-5745
e-mail: fujipolytw@fujipoly.com.tw

FUJIPOLY® DISTRIBUTORS

France Compelma S.A.S.

Z.A. des GODETS
33, rus des petits ruisseaux
91370 VERRIÈRES LE BUISSON
France
tel: +33 (0)1 69 75 21 21 fax: +33 (0)1 60 11 40 19
e-mail: info@compelma.com
web: www.compelma.com

Belgium & Netherlands MAVOM N.V.

Molenberglei 14
2627 Schelle
Belgium
tel: +32 (0)3 880 07 60 fax: +31 (0)172 436361
fax: +32 (0)3 880 07 80 fax: +31 (0)172 420310
e-mail: info@mavom.be e-mail: info@mavom.nl
web site: www.mavom.be web: www.mavom.nl

Italy Murata Elettronica S.p.A

Via S. Carlo, 1
20040 Caponago-MI
Italy
tel: +39 (0)2 95968 1 fax: +39 (0)2 95968 353
e-mail: info@murat.it
web: www.murata.eu

Germany Nucletron Technologies GmbH

Gaertnerstr. 60
80992 Muenchen
Germany
tel: +49 89 14 90 02-0 fax: +49 89 14 90 02-11
e-mail: info@nucletron.de
web site: www.nucletron.de

UK Osco Limited

Avant Business Centre • Unit 6 Third Avenue
Bletchley • Milton Keynes • MK1 1DR
U.K.
tel: +44 (0)1908 376 688 fax: +44 (0)1908 379 916
e-mail: sales@osco.uk.com
web site: www.osco.uk.com

Sweden Promoco Scandinavia AB

tel: +46 (0)8 792 06 90 fax: +46 (0)8 792 20 90
e-mail: info@promoco.se
web: www.promoco.se

Denmark Newtronic ApS

tel: +45 7669 7090 fax: +45 7627 7090
e-mail: nr@newtronic.dk
web: www.newtronic.dk

Turkey Mechsoft

tel: +312 482 59 49 fax: +312 482 54 39
e-mail: gokhan.erdogdu@mechsoft.com.tr
web: www.mechsoft.com.tr

Spain Nufesa Electronics

tel: +34 93 340 50 25 fax: +34 93 352 88 46
e-mail: commercial@nufesa.com
web: www.nufesa.com

Israel Elimec

P.O. Box 5006 • 1 Lishanski Street
Rishon LeZion, 75150
Israel
tel: +972 3 951 41 22 fax: +972 3 951 41 66
e-mail: mail@elimec.co.il
web: www.elimec.com



ZEBRA® and SARCON® are registered trademarks of Fujipoly®

STATEMENT OF LIEU OF WARRANTY: All technical information and data in this document is based on tests and is believed to be accurate and reliable. Nevertheless, since the products described herein are not provided to conform with mutually accepted specifications and the use thereof is unknown, the manufacturer and seller of the product do not guarantee results, freedom from patent infringement, or suitability of the product for any application thereof. The manufacturer and seller of the product described in this document will provide all possible technical assistance and will replace any products proven defective. No statement or recommendation made by the manufacturer or seller not contained herein shall have any force of effect unless in conformity with an agreement signed by an officer of the seller or manufacturer. Product testing by the purchaser is recommended in order to confirm expected results. Copyright© 2010 Fujipoly®



an ISO9001:2008 registered company

***A Global Network To Serve All Your
Thermal Interface Material and Elastomeric Connector Needs.***

Japan USA Thailand Europe Singapore Hong Kong China Taiwan Malaysia